

Xterra


Tightening the seat carriage

SB440R
SB540R

1. Under the seat on the right side, there is a nut between two allen head bolts. Loosen the nut with a 14mm wrench. Don't take the nut off, just loosen it.



2. On the opposite side of the machine there is a silver allen head bolt in between two black allen head bolts. There is a small dot on the outside of the bolt. This dot needs to be at the 3 o'clock position or the 9 o'clock position. With an allen wrench, turn the bolt to the correct position.

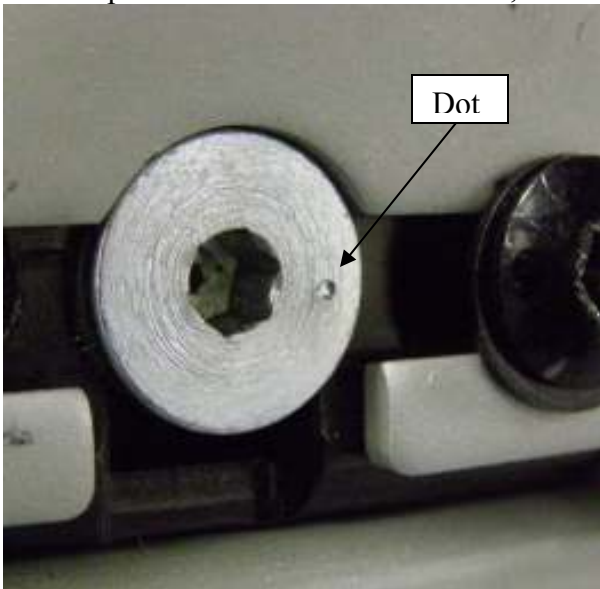

3. While holding the bolt in the correct position with the allen wrench, tighten the nut on the other side that was loosened in step #1.